

Zakaria Saadi

Ana I. S. Neves

Centre for Graphene Science, College of Engineering Mathematics and Physical Sciences, University of Exeter, Exeter EX4 4QF, UK

z.saadi@exeter.ac.uk

With the emergence of wearable technologies and the high demand of flexible organic devices, there is a strong need in investigating self-powered electronics and carbon-based materials due to their high natural abundance. This will satisfy a key requirement for commercialisation, which is cost-effective manufacturing. Moreover, as electronic systems are showing significant advancements, it is believed that the power requirements of typical e-skin devices will be in the range of microwatts. This renders the human body a continuous and an environmentally friendly source of mechanical and thermal energy.

Graphene is a material of choice in this case because of its remarkable high thermal, electrical and mechanical properties, allied to its flexibility and lightweight. These properties will be crucial in the integration of graphene on textiles.

Following our previous work demonstrating wearable devices and humidity sensors made with graphene [1]-[3], as well as triboelectric nanogenerators (TEGs) [4] based on graphene, this work shows the steps toward integrating these two technologies into self-powered devices capable of powering up an organic sensor using mechanical energy. These TEGs are capable of scavenging energy from human motions as well as being an independent and continuous type of energy compared to solar and thermal energy. Triboelectricity is a phenomenon that occurs between two materials that get statically charged when they become in contact with each other as a result of electrons and ions exchanges which are electrostatically induced. In order to achieve flexibility, various polymer dielectrics (triboelectric materials) such as polydimethylsiloxane (PDMS) and polymethyl methacrylate (PMMA) have been investigated with graphene acting as an electrode. In addition, to enhance the electronegativity, the top of the PDMS film was

treated with sulfur hexafluoride (SF_6) plasma to fluorinate the surface of PDMS in order to improve triboelectrification as well as the effect of bending, as highlighted in Figure 1.

Figures

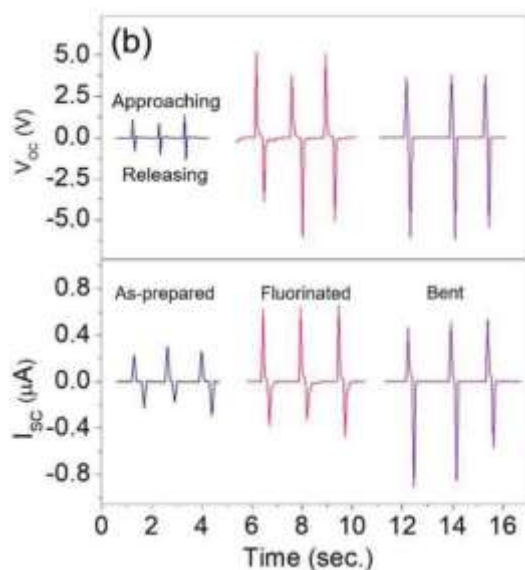


Figure 1: Open-circuit voltage and closed-circuit current of graphene based TENG with fluorinated PDMS, in addition to the effect induced by bending the TENG device [4].

References

- [1] Neves AIS, Rodrigues DP, De Sanctis A, et al, *Scientific Report*, 7 (2017) 1-10
- [2] Somov A, Alonso ET, Craciun MF, Neves AIS, et al, *Proc IEEE Sensors*, (2017) 1-3
- [3] E. T. Alonso, D. Shin, G. Rajan, Neves AIS, et al, *Advanced Science*, 15 (2019) 1-7
- [4] Shin DW, Barnes MD, Walsh K, et al, *Advanced Materials*, 39 (2018) 1-7