
Aldo Di Carlo¹

¹CHOSE – Centre for Hybrid and Organic Solar Energy, Dept. Elect. Eng., University of Rome Tor Vergata, Roma, Italy

²National University of Science and Technology NUST-MISIS, Moscow, Russia

aldo.dicarlo@uniroma2.

Two-dimensional materials for efficient halide Perovskite solar cells

Many factors can influence the efficiency and stability characteristics of halide Perovskite Solar Cells (PSCs). In particular, interfaces can influence layers deposition, charge recombinations and compound intermixing/diffusion, representing a critical aspect for scaling up activities aiming to exploit at industrial level perovskite photovoltaics. In this perspective, bidimensional (2D) nanomaterials, such as graphene and related materials can play a primary role owing to their 2D nature and the large variety of 2D crystals, whose complementary opto/electronic properties, can be on-demand tuned by chemical functionalization and edge modification. The so called Graphene Interface Engineering (GIE) has shown to be extremely effective in PSC technology both at lab cells (small area) level and at large area (module) level. We demonstrate the use of graphene and 2D materials as an effective way to control the morphology [1] and to improve stability and efficiency [2,3]. By dispersing graphene flakes into the mesoporous TiO₂ layer and by inserting graphene oxide (GO) as interlayer between perovskite and Spiro-OMeTAD layers, we demonstrate a PCE exceeding 18% with a two-step MAPI deposition, carried out in air.[2] Further optimization of the 2D interface layers could promote the efficiency above 20%[4] with a strong improvement of the stability. The proposed approach has been exploited for the fabrication of state-of-the-art large area perovskite modules with a PCE of 13.7% (active area exceeding 100 cm²) paving the way to an industrialization phase compatible with standard fabrication processes [5]. In this respect, the Spear Head project “Solar Farm” of the Graphene Flagship will make use of the GIE for a pilot-line fabrication of Graphene-Perovskite modules to demonstrate the feasibility of the approach in the realization of PV panels..

References

- [1] F. Biccari et al. *Adv. Energy Mat.* 2017, 7, 1701349
- [2] A. Agresti et al. *ChemSusChem* 2016, 9, 2609
- [3] A. Agresti et al. *ACS Energy Lett.* 2017, 2, 279–287
- [4] L. Najafi et al., *ACS Nano*, 2018, 12 (11), pp 10736–
- [5] A. Palma et al. *IEEE J. Photovoltaics* 2017, 7, 1674

Figures

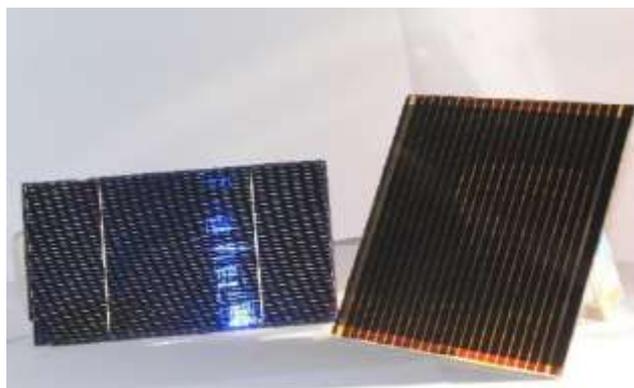


Figure 1: comparison between silicon solar cell (left) and graphene-perovskite solar module (right)