

# Magnetic and dielectric nanoparticle based polymer tri-composites for actuators applications

**A Mootia<sup>a,b</sup>**

CM Costa<sup>c,d</sup>, A Maceiras<sup>a</sup>, N Pereira<sup>c,e</sup>, CR Tubio<sup>a</sup>, JL Vilas<sup>a,f</sup>, S Besbes-Hentati<sup>b</sup>, S Lanceros-Mendez<sup>a,g</sup>

*a, BCMaterials, Basque Center for Materials, Applications and Nanostructures, UPV/EHU Science Park, 48940, Leioa, Spain,*

*b, Universitéde Cathage, Faculté des Sciences de Bizerte, 13ES08, Laboratoire de Chimie des Matériaux, 7021, Bizerte, Tunisia*

*c, Centro de Física, Universidade do Minho, 4710-057 Braga, Portugal*

*d, Centro de Química, Universidade do Minho, 4710-057 Braga, Portugal*

*e, Centro ALGORITMI, University of Minho, Campus de Azurém, 4800-058 Guimarães, Portugal*

*f, Departamento de Química Física, Facultad de Ciencia y Tecnología, Universidad del País Vasco (UPV/EHU), Apdo. 644, Bilbao, Spain*

*g, Ikerbasque, Basque Foundation for Science, 48013 Bilbao, Spain*

[asma.mooti@bcmaterials.net](mailto:asma.mooti@bcmaterials.net)

## Abstract


Smart, stimuli-responsive polymer nanocomposites that result from the combination of two or more fillers allow to combine the excellent properties of each component, allowing to tailor multifunctionality for specific applications [1,2]. In this work, multifunctional tri-composite materials, based on dielectric BaTiO<sub>3</sub> (BT) and magnetic CoFe<sub>2</sub>O<sub>4</sub> (CFO) fillers into a polymer matrix of poly(vinylidene-fluoride) (PVDF), have been developed with high dielectric and magnetic properties. The microstructure, polymer phase, thermal, magnetic, dielectric and electrical properties of the composites with different compositions have been investigated. A high dielectric constant of 26 at 1 kHz and a magnetization of 5.7 emu/g are obtained for a sample of 10%BT-10%CFO/PVDF, which was used for the development of a magnetic actuator, allowing magnetic deformation control. The magnetic

actuator displays a rapid response to the application of a magnetic field, allowing active switching control of an electrical circuit.

## References

- [1] J Oliveira, V Correia, H Castro, P Martins, S Lanceros-Mendez. Additive Manufacturing, 21 (2018)269
- [2] S Kamila. American Journal of Applied Sciences, 10 (2013) 876

## Figures

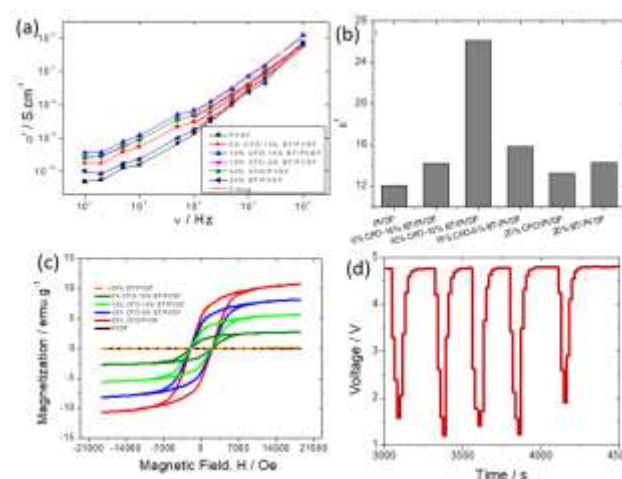

**Figure 1:** (a) AC electrical conductivity. (b) Dielectric constant at 1 kHz. (c) Magnetic hysteresis loops. (d) Actuator response for 10%BT-10%CFO/PVDF sample.



**Figure 2:** Schematic representation of the magnetic actuator and the corresponding electronic circuit.