Microscopic theory of plasmon-enabled resonant terahertz detection in bilayer graphene

Andrea Tomadin¹

M. Carrega², M. Polini^{1,3,4} ¹Dipartimento di Fisica, Università di Pisa, Largo Bruno Pontecorvo 3, I-56127 Pisa, Italy ²CNR-SPIN, Via Dodecaneso 33, 16146 Genova, Italy ³School of Physics & Astronomy, University of Manchester, Oxford Road, Manchester M13 9PL, UK ⁴Istituto Italiano di Tecnologia, Graphene Labs, Via Morego 30, I-16163 Genova, Italy andrea.tomadin@unipi.it

The electron gas hosted in a two-dimensional solid-state matrix under external driving supports the propagation of plasma waves.[1] Nonlinear interactions between plasma waves generate a constant density gradient which can be detected as a dc potential signal at the boundaries of the system. This phenomenon is at the heart of a plasma-wave photodetection scheme which was first introduced by Dyakonov and Shur for electronic systems with a parabolic dispersion [2] and then extended to the massless Dirac fermions in graphene.[3]

Motivated by a recent experimental breakthrough in the resonant detection of plasma waves in double-gated bilayer graphene, [4] we develop the theory of plasma-wave photodetection in such geometry, [5] where the dispersion relation depends locally and dynamically on the intensity of the plasma wave. We show that quantum capacitance effects, arising from the local fluctuations of the electronic dispersion, modify the intensity of the photodetection signal. An external electrical bias, e.g. induced by top and bottom gates, can be used to control the strength of the quantum capacitance corrections, and thus the photoresponse.

REFERENCES

- [1] A.N. Grigorenko, M. Polini, and K.S. Novoselov, Nature Photon. 6, 749 (2012).
- [2] M.I. Dyakonov and M.S. Shur, IEEE Trans. Electron Devices 43, 380 (1996); *ibid.* 43, 1640 (1996).
- [3] A. Tomadin and M. Polini, Phys. Rev. B 88, 205426 (2013).
- [4] D.A. Bandurin *et al.*, Nature Commun. **9**, 5392 (2018).
- [5] A. Tomadin, M. Carrega, and M. Polini, Phys. Rev. B 103, 085426 (2021).

FIGURES

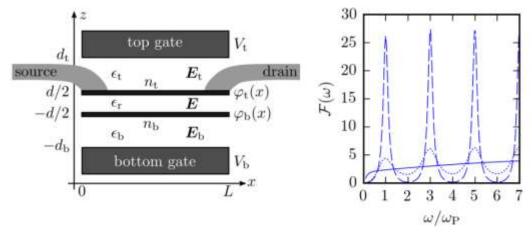


Figure 1: Schematics of the double-gated bilayer graphene setup (left) and photoresponse as a function of the driving frequency (right) for several carrier densities n = 0.1 (solid), 1.0 (dotted), and 5.0 (dashed) × 10¹² cm⁻².

GRAPHENE AND 2DM ONLINE CONFERENCE (GO2021)